


GROOVE TOOLS - O-RING - SOLID CARBIDE

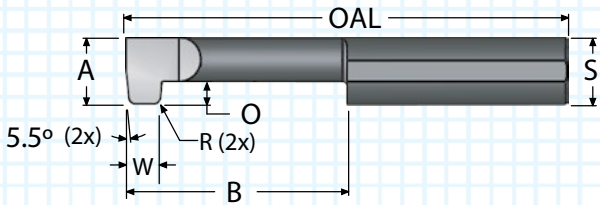

- ALTiN+ coating for higher Surface Feet per Minute
- Elliptically ground for maximum strength
- Made with premium submicron grade carbide

"A" MIN BORE	"W" GROOVE WIDTH	"B" MAX DEPTH	"R" CORNER RADIUS	"O" OFF SET	"S" SHANK DIA.	OAL	ORDER #	
							UNCOATED	ALTiN+
0.250	0.097	0.500	0.015	0.110	0.250	2.50	GOR096-8	GOR096-8A
0.250	0.142	0.562	0.040	0.110	0.250	2.50	GOR141-9	GOR141-9A
0.250	0.145	0.625	0.040	0.110	0.250	2.50	GOR144-10	GOR144-10A
0.375	0.175	0.750	0.015	0.125	0.375	2.50	GOR174-12	GOR174-12A
0.375	0.209	0.812	0.040	0.125	0.375	2.50	GOR208-13	GOR208-13A
0.375	0.242	0.937	0.040	0.125	0.375	2.50	GOR241-15	GOR241-15A

THREAD MILLS

SINGLE POINT TOOLS
GROOVING

INDEXABLE TOOLS

PORT - CAVITY

SPECIALTY