



SUN HYDRAULIC CARTRIDGE VALVE TOOLS

FINISHER - CARBIDE TIPPED

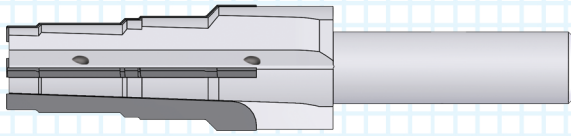

Coolant Hole(s) Each Flute

- ALTiN+ coating for higher cutting speed
- Polished flute face for optimum performance
- Precision ground for maximum concentricity

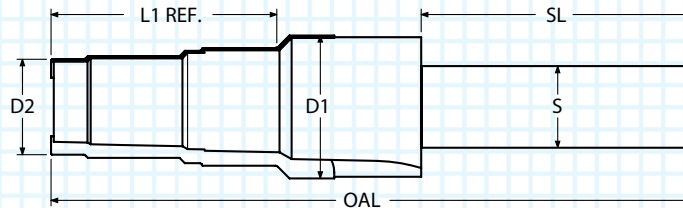

This illustration shows the largest and smallest diameter.
Visit website www.sct-usa.com for more details.

D1	D2	L1	S	SL	OAL	FLUTES	THREAD	ORDER #		EDP #	
								UNCOATED	ALTiN+	UNCOATED	ALTiN+
1.312	0.876	2.073	0.750	2.50	5.88	4	1.0-14UNS-2B	T-2A-FINISH-X8	T-2A-FINISH-X8A	400801	400851
1.709	0.876	1.885	0.750	2.25	5.38	4	1.0-14UNS-2B	T-3A-FINISH-X8	T-3A-FINISH-X8A	400804	400854
1.079	0.876	1.635	0.750	2.25	5.13	3	1.0-14UNS-2B	T-5A-FINISH-X6	T-5A-FINISH-X6A	400614	400616
0.704	0.438	0.752	0.500	2.00	4.00	3	M16X1.5-6H	T-8A-FINISH-X3	T-8A-FINISH-X3A	400811	400861
1.000	0.688	1.726	0.750	2.25	5.25	4	M20X1.5-6H	T-10A-FINISH-X8	T-10A-FINISH-X8A	400813	400863
1.000	0.688	2.036	0.750	2.25	5.50	3	M20X1.5-6H	T-11A-FINISH-X6	T-11A-FINISH-X6A	400811	400813
1.000	0.688	1.539	0.750	2.25	5.00	3	M20X1.5-6H	T-13A-FINISH-X6	T-13A-FINISH-X6A	400817	400867
1.563	1.251	2.448	1.000	2.25	6.00	4	M36X2.0-6H	T-16A-FINISH-X8	T-16A-FINISH-X8A	400822	400872
1.750	1.251	2.448	1.000	2.50	6.50	4	M36X2.0-6H	T-17A-FINISH-X8	T-17A-FINISH-X8A	400825	400875
2.063	1.626	3.135	1.000	2.50	6.88	4	M48X2.0-6H	T-18A-FINISH-X8	T-18A-FINISH-X8A	400828	400878
1.000	0.688	2.539	0.750	2.25	6.00	4	M20X1.5-6H	T-21A-FINISH-X8	T-21A-FINISH-X8A	400831	400881
0.938	0.516	1.377	0.750	2.25	4.88	3	M16X1.5-6H	T-162A-FINISH-X6	T-162A-FINISH-X6A	400602	400604
0.938	0.516	1.800	0.750	2.25	5.25	3	M16X1.5-6H	T-163A-FINISH-X6	T-163A-FINISH-X6A	400607	400610