


MINI BORING BARS - SOLID CARBIDE

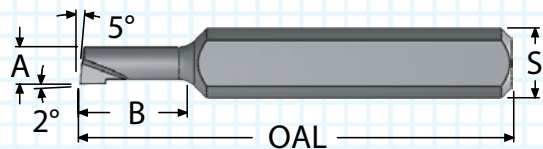

- Flute engineered for maximum strength
- ALTiN+ coating for improved surface finish
- Made with premium submicron grade carbide
- Starts at 0.015 minimum bore

"A" MIN BORE	"B" MAX DEPTH	"S" SHANK DIA.	OAL	ORDER #	
				UNCOATED	ALTiN+
0.015	0.050	0.125	1.50	MB015050	MB015050A
0.020	0.075	0.125	1.50	MB020075	MB020075A
0.025	0.100	0.125	1.50	MB025100	MB025100A
0.025	0.125	0.125	1.50	MB025125	MB025125A
0.030	0.100	0.125	1.50	MB030100	MB030100A
0.030	0.125	0.125	1.50	MB030125	MB030125A
0.030	0.150	0.125	1.50	MB030150	MB030150A
0.035	0.100	0.125	1.50	MB035100	MB035100A
0.035	0.150	0.125	1.50	MB035150	MB035150A
0.035	0.200	0.125	1.50	MB035200	MB035200A
0.040	0.100	0.125	1.50	MB040100	MB040100A
0.040	0.150	0.125	1.50	MB040150	MB040150A
0.040	0.200	0.125	1.50	MB040200	MB040200A
0.040	0.250	0.125	1.50	MB040250	MB040250A
0.045	0.100	0.125	1.50	MB045100	MB045100A
0.045	0.150	0.125	1.50	MB045150	MB045150A
0.045	0.200	0.125	1.50	MB045200	MB045200A
0.045	0.250	0.125	1.50	MB045250	MB045250A
0.045	0.300	0.125	1.50	MB045300	MB045300A
0.045	0.350	0.125	1.50	MB045350	MB045350A

THREAD MILLS

SINGLE POINT TOOLS
BORING

INDEXABLE TOOLS

PORT - CAVITY

SPECIALTY