
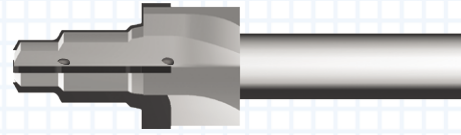


EATON VICKERS CAVITY TOOLS



ROUGHERS - CARBIDE TIPPED

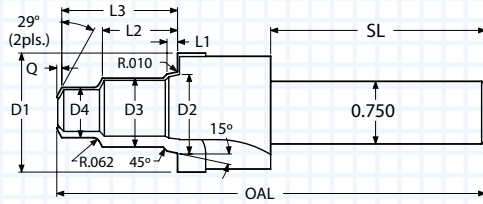

Coolant Hole(s) Each Flute

TWO WAY CAVITY



D1	D2	D3	D4	L1	L2	L3	Q	OAL	SL	ORDER #		EDP #	
										UNCOATED	ALTiN+	UNCOATED	ALTiN+
1.163	0.789	0.663	0.476	0.108	0.750	1.188	0.050	4.00	2.00	C-08-2-ROUGH-X8	C-08-2-ROUGH-X8A	400300	400302
1.163	0.920	0.787	0.601	0.108	0.934	1.312	0.060	4.00	2.00	C-10-2-ROUGH-X8	C-10-2-ROUGH-X8A	400312	400314
1.475	1.124	0.950	0.913	0.138	1.375	1.825	0.075	5.25	2.25	C-12-2-ROUGH-X8	C-12-2-ROUGH-X8A	400324	400326
1.725	1.376	1.209	1.102	0.138	1.344	1.844	0.075	5.50	2.25	C-16-2-ROUGH-X8	C-16-2-ROUGH-X8A	400336	400338

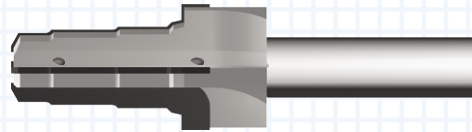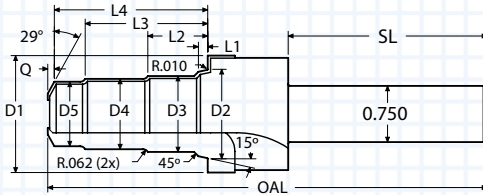

Coolant Hole(s) Each Flute

THREE WAY CAVITY

D1	D2	D3	D4	D5	L1	L2	L3	L4	Q	OAL	SL	ORDER #		EDP #	
												UNCOATED	ALTiN+	UNCOATED	ALTiN+
1.163	0.789	0.663	0.601	0.538	0.108	0.718	1.270	1.703	0.060	5.00	2.12	C-08-3-ROUGH-X8	C-08-3-ROUGH-X8A	400304	400306
1.163	0.920	0.787	0.664	0.601	0.108	0.850	1.500	1.875	0.060	5.00	2.12	C-10-3-ROUGH-X8	C-10-3-ROUGH-X8A	400316	400318
1.475	1.124	0.950	0.913	0.851	0.138	1.375	2.275	2.725	0.075	6.25	2.25	C-12-3-ROUGH-X8	C-12-3-ROUGH-X8A	400328	400330
1.725	1.376	1.209	1.102	1.039	0.138	1.344	2.469	2.968	0.110	6.25	2.12	C-16-3-ROUGH-X8	C-16-3-ROUGH-X8A	400340	400342

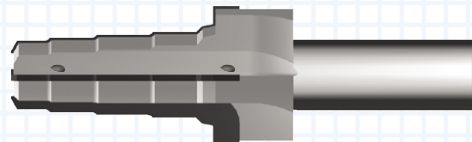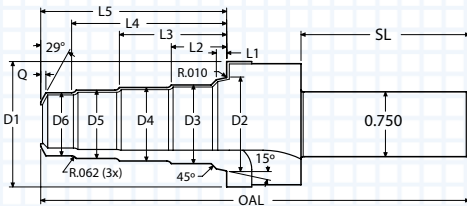

Coolant Hole(s) Each Flute

FOUR WAY CAVITY

D1	D2	D3	D4	D5	D6	L1	L2	L3	L4	L5	Q	OAL	SL	ORDER #		EDP #	
														UNCOATED	ALTiN+	UNCOATED	ALTiN+
1.163	0.789	0.663	0.601	0.538	0.476	0.108	0.718	1.270	1.830	2.210	0.050	5.50	2.12	C-08-4-ROUGH-X8	C-08-4-ROUGH-X8A	400308	400310
1.163	0.920	0.787	0.726	0.664	0.601	0.108	0.872	1.500	2.125	2.500	0.060	5.50	2.12	C-10-4-ROUGH-X8	C-10-4-ROUGH-X8A	400320	400322
1.475	1.124	0.950	0.913	0.851	0.788	0.138	1.375	2.275	3.175	3.625	0.075	7.00	2.25	C-12-4-ROUGH-X8	C-12-4-ROUGH-X8A	400332	400334
1.725	1.376	1.209	1.102	1.039	0.977	0.138	1.344	2.469	3.594	4.094	0.110	7.25	2.25	C-16-4-ROUGH-X8	C-16-4-ROUGH-X8A	400344	400346

THREAD MILLS

SINGLE POINT

INDEXABLE TOOLS



Cavity Tools

SPECIALTY

EATON VICKERS CAVITY TOOLS

FINISHERS - CARBIDE TIPPED

THREAD MILLS

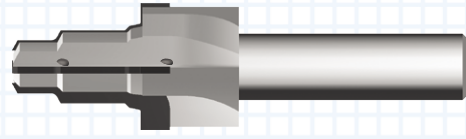
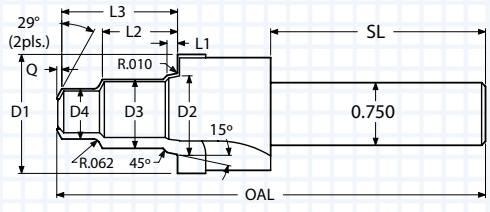


Coolant Hole(s) Each Flute

SINGLE POINT

TWO WAY CAVITY

D1	D2	D3	D4	L1	L2	L3	Q	OAL	SL	ORDER #		EDP #	
										UNCOATED	ALTiN+	UNCOATED	ALTiN+
1.188	0.814	0.688	0.501	0.108	0.750	1.188	0.050	4.00	2.00	C-08-2-FINISH-X8	C-08-2-FINISH-X8A	400348	400350
1.188	0.946	0.812	0.626	0.108	0.934	1.312	0.060	4.00	2.00	C-10-2-FINISH-X8	C-10-2-FINISH-X8A	400360	400362
1.500	1.149	0.975	0.938	0.138	1.375	1.825	0.075	5.25	2.25	C-12-2-FINISH-X8	C-12-2-FINISH-X8A	400372	400374
1.750	1.401	1.234	1.127	0.138	1.344	1.844	0.075	5.50	2.25	C-16-2-FINISH-X8	C-16-2-FINISH-X8A	400384	400386

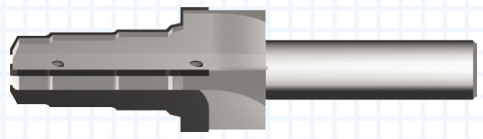
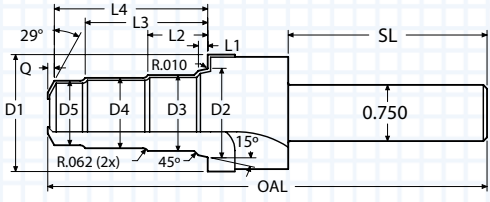


Coolant Hole(s) Each Flute

INDEXABLE TOOLS

THREE WAY CAVITY

D1	D2	D3	D4	D5	L1	L2	L3	L4	Q	OAL	SL	ORDER #		EDP #	
												UNCOATED	ALTiN+	UNCOATED	ALTiN+
1.188	0.814	0.688	0.626	0.563	0.108	0.718	1.270	1.703	0.060	5.00	2.12	C-08-3-FINISH-X8	C-08-3-FINISH-X8A	400352	400354
1.188	0.945	0.812	0.689	0.626	0.108	0.850	1.500	1.875	0.060	5.00	2.12	C-10-3-FINISH-X8	C-10-3-FINISH-X8A	400364	400366
1.500	1.149	0.975	0.938	0.876	0.138	1.375	2.275	2.725	0.075	6.25	2.25	C-12-3-FINISH-X8	C-12-3-FINISH-X8A	400376	400378
1.750	1.401	1.234	1.127	1.064	0.138	1.344	2.469	2.968	0.110	6.25	2.12	C-16-3-FINISH-X8	C-16-3-FINISH-X8A	400388	400390

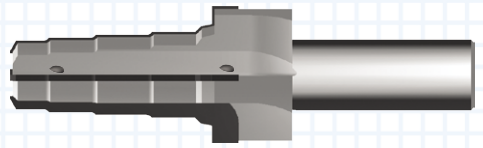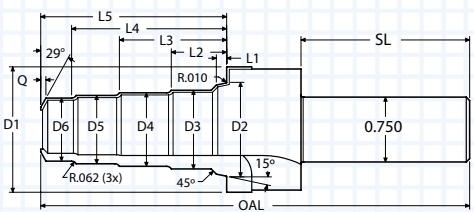

Coolant Hole(s) Each Flute

Cavity Tools

FOUR WAY CAVITY

D1	D2	D3	D4	D5	D6	L1	L2	L3	L4	L5	Q	OAL	SL	ORDER #		EDP #	
														UNCOATED	ALTiN+	UNCOATED	ALTiN+
1.188	0.814	0.688	0.626	0.563	0.501	0.108	0.718	1.270	1.830	2.210	0.050	5.50	2.12	C-08-4-FINISH-X8	C-08-4-FINISH-X8A	400356	400358
1.188	0.945	0.812	0.751	0.689	0.626	0.108	0.872	1.500	2.125	2.500	0.060	5.50	2.12	C-10-4-FINISH-X8	C-10-4-FINISH-X8A	400368	400370
1.500	1.149	0.975	0.938	0.876	0.813	0.138	1.375	2.275	3.175	3.625	0.075	7.00	2.25	C-12-4-FINISH-X8	C-12-4-FINISH-X8A	400380	400382
1.750	1.401	1.234	1.127	1.064	1.002	0.138	1.344	2.469	3.594	4.094	0.110	7.25	2.25	C-16-4-FINISH-X8	C-16-4-FINISH-X8A	400392	400394

SPECIALTY

PORT & CAVITY TECHNICAL INFORMATION

MATERIAL	HB/Rc	SPEED (SFM)		CUTTING CONDITIONS	
		UNCOATED	ALTiN+	INFEEED PER FLUTE REAM	INFEEED PER FLUTE SPOT FACE
CAST IRON	130 HB	75-210	200-450	.001-.0025	.0008-.0020
CARBON STEEL	18 Rc	125-190	190-400	.001-.0030	.001-.0020
ALLOY STEEL	20 Rc	70-135	130-350	.001-.0030	.0008-.0020
TOOL STEEL	25 Rc	75-100	100-220	.001-.0025	.0005-.0020
300 STAINLESS STEEL	150 HB	90-100	100-230	.001-.0020	.0007-.0015
400 STAINLESS STEEL	195 HB	90-135	135-300	.001-.0020	.0005-.0015
HIGH TEMP ALLOY (NICKEL & COBALT BASE)	20 Rc	30-125	100-150	.0008-.0015	.0005-.0010
TITANIUM	25 Rc	50-100	100-140	.001-.0020	.0005-.0010
HEAT TREATED ALLOYS (38-45Rc)	40 Rc	50-75	75-130	.0008-.0015	.0005-.0010
ALUMINUM	100 HB	850-1000	800-1500	.002-.0040	.0010-.0030
BRASS, ZINC	80 HB	750-950	800-1200	.002-.0040	.0010-.0030

SFM = Surface Feet per Minute

RPM = SFM x 3.82 divided by tool diameter

Starting parameters only. Setup and machine rigidity may affect performance.

PROBLEM	CAUSE	SOLUTION
RAPID FLANK WEAR	CUTTING CONDITIONS	Check for excessive speed and feed - see chart.
	TOOL	Select a coated tool.
	PROGRAM	Remove dwell from program at end of cut.
BUILT-UP EDGE	TOOL	Select a coated tool. The coating will resist built-up edges.
	HEAT	Use coolant through port tool. If coolant is not available, use shop air and a coated tool.
SURFACE TORN	TOOL	Use a coated tool. On most carbon steels, an uncoated tool will not produce an acceptable finish.
CHATTER	TOOL	Hone cutting edge of spot face. Use Coated Tool. Increase chip load.
LIGHT CHATTER	PROGRAM	Increase speed by 15-20%. A faster speed reduces forces. A dwell typically will not remove chatter.
POOR TOOL LIFE	AMOUNT OF STOCK	Rough port to 0.97 inch of finish size.
	PART	Make sure prior operation did not work harden the material.

SAMPLE PROGRAM FOR MAXIMUM PRODUCTIVITY

N51 (Sample Port Tool Program: MS33649-4RA (ALTiN+) cutting Carbon Steel

T51 M06

Select Tool

S2916 M03

SFM = 300 ; RPM = 300 x 3.82 / Reamer Diameter

G00 G90 G54 X0. Y0.

RPM = 300 X 3.82 / 0.393

G43 H51 Z0.1 M08

RPM = 2916

G01 Z-0.6 F23.3

Feed Rate = RPM x 0.002 x 4 (Number of Flutes)

S1290 M03

RPM = 300 x 3.82 / 0.888 (Spot Face Diameter)

G04 P1.

Dwell to slow down spindle

G01 Z-.73 F10.3

Feed rate = RPM x 0.002 x 4 (Number of Flutes)

G00 Z5. M09