
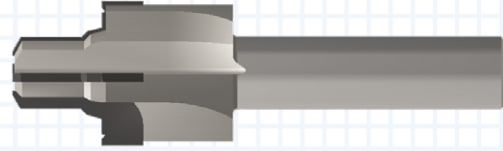


ISO6149/1 (SAEJ2244/1) METRIC PORT TOOL WITH ID NOTCH - CARBIDE TIPPED

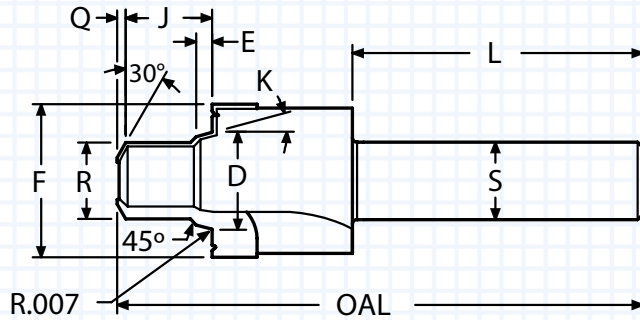

- Metric port with identification notch
- Polished flute face for optimum performance
- Precision ground for maximum concentricity
- ALTiN+ coating extends tool life

K (deg)	D (mm)	E (mm)	F (mm)	R (mm)	J (mm)	Q (inch)	L (inch)	S (inch)	OAL (inch)	FLUTES	THREAD	ORDER #		EDP #	
												UNCOATED	ALTiN+	UNCOATED	ALTiN+
12°	9.15	1.8	17.1	7.0	11.6	0.032	1.75	0.500	3.00	3	M8X1	6149-M8X1-ID	6149-M8X1-IDA	402337	402387
12°	11.15	1.8	20.1	9.0	11.6	0.045	1.75	0.500	3.00	3	M10X1	6149-M10X1-ID	6149-M10X1-IDA	402301	402351
15°	13.85	2.6	23.1	10.5	14.1	0.045	1.88	0.500	3.12	3	M12X1.5	6149-M12X1.5-ID	6149-M12X1.5-IDA	402304	402354
15°	15.85	2.6	25.1	12.5	14.1	0.055	1.88	0.500	3.38	4	M14X1.5	6149-M14X1.5-ID	6149-M14X1.5-IDA	402307	402357
15°	17.85	2.6	28.1	14.5	15.6	0.060	1.88	0.500	3.38	4	M16X1.5	6149-M16X1.5-ID	6149-M16X1.5-IDA	402310	402360
15°	19.85	2.6	30.1	16.5	17.1	0.070	2.12	0.750	3.70	4	M18X1.5	6149-M18X1.5-ID	6149-M18X1.5-IDA	402313	402363
15°	21.85	2.6	32.1	18.5	17.5	0.080	2.12	0.750	3.75	4	M20X1.5	6149-M20X1.5-ID	6149-M20X1.5-IDA	402316	402366
15°	23.85	2.6	34.1	20.5	18.1	0.080	2.12	0.750	3.80	4	M22X1.5	6149-M22X1.5-ID	6149-M22X1.5-IDA	402319	402369
15°	29.45	3.3	40.1	25.0	22.1	0.080	2.12	0.750	3.94	4	M27X2.0	6149-M27X2.0-ID	6149-M27X2.0-IDA	402322	402372
15°	35.45	3.3	49.1	31.0	22.1	0.090	2.25	1.000	4.25	4	M33X2.0	6149-M33X2.0-ID	6149-M33X2.0-IDA	402325	402375
15°	44.45	3.3	60.1	40.0	22.6	0.090	2.25	1.000	4.35	4	M42X2.0	6149-M42X2.0-ID	6149-M42X2.0-IDA	402328	402378
15°	50.45	3.3	66.1	46.0	25.1	0.095	2.25	1.000	4.35	4	M48X2.0	6149-M48X2.0-ID	6149-M48X2.0-IDA	402331	402381
15°	62.45	3.3	76.1	58.0	27.6	0.095	2.25	1.250	4.35	4	M60X2.0	6149-M60X2.0-ID	6149-M60X2.0-IDA	402334	402384

Thread mills are available. See pages 24-28.

PORT & CAVITY TECHNICAL INFORMATION

MATERIAL	HB/Rc	SPEED (SFM)		CUTTING CONDITIONS	
		UNCOATED	ALTiN+	INFEEED PER FLUTE REAM	INFEEED PER FLUTE SPOT FACE
CAST IRON	130 HB	75-210	200-450	.001-.0025	.0008-.0020
CARBON STEEL	18 Rc	125-190	190-400	.001-.0030	.001-.0020
ALLOY STEEL	20 Rc	70-135	130-350	.001-.0030	.0008-.0020
TOOL STEEL	25 Rc	75-100	100-220	.001-.0025	.0005-.0020
300 STAINLESS STEEL	150 HB	90-100	100-230	.001-.0020	.0007-.0015
400 STAINLESS STEEL	195 HB	90-135	135-300	.001-.0020	.0005-.0015
HIGH TEMP ALLOY (NICKEL & COBALT BASE)	20 Rc	30-125	100-150	.0008-.0015	.0005-.0010
TITANIUM	25 Rc	50-100	100-140	.001-.0020	.0005-.0010
HEAT TREATED ALLOYS (38-45Rc)	40 Rc	50-75	75-130	.0008-.0015	.0005-.0010
ALUMINUM	100 HB	850-1000	800-1500	.002-.0040	.0010-.0030
BRASS, ZINC	80 HB	750-950	800-1200	.002-.0040	.0010-.0030

SFM = Surface Feet per Minute
RPM = SFM x 3.82 divided by tool diameter

Starting parameters only. Setup and machine rigidity may affect performance.

PROBLEM	CAUSE	SOLUTION
RAPID FLANK WEAR	CUTTING CONDITIONS	Check for excessive speed and feed - see chart.
	TOOL	Select a coated tool.
	PROGRAM	Remove dwell from program at end of cut.
BUILT-UP EDGE	TOOL	Select a coated tool. The coating will resist built-up edges.
	HEAT	Use coolant through port tool. If coolant is not available, use shop air and a coated tool.
SURFACE TORN	TOOL	Use a coated tool. On most carbon steels, an uncoated tool will not produce an acceptable finish.
CHATTER	TOOL	Hone cutting edge of spot face. Use Coated Tool. Increase chip load.
LIGHT CHATTER	PROGRAM	Increase speed by 15-20%. A faster speed reduces forces. A dwell typically will not remove chatter.
POOR TOOL LIFE	AMOUNT OF STOCK	Rough port to 0.97 inch of finish size.
	PART	Make sure prior operation did not work harden the material.

SAMPLE PROGRAM FOR MAXIMUM PRODUCTIVITY

N51 (Sample Port Tool Program: MS33649-4RA (ALTiN+) cutting Carbon Steel

T51 M06

Select Tool

S2916 M03

SFM = 300 ; RPM = 300 x 3.82 / Reamer Diameter

G00 G90 G54 X0. Y0.

RPM = 300 X 3.82 / 0.393

G43 H51 Z0.1 M08

RPM = 2916

G01 Z-0.6 F23.3

Feed Rate = RPM x 0.002 x 4 (Number of Flutes)

S1290 M03

RPM = 300 x 3.82 / 0.888 (Spot Face Diameter)

G04 P1.

Dwell to slow down spindle

G01 Z-.73 F10.3

Feed rate = RPM x 0.002 x 4 (Number of Flutes)

G00 Z5. M09