


GROOVE TOOLS - FULL RADIUS - SOLID CARBIDE

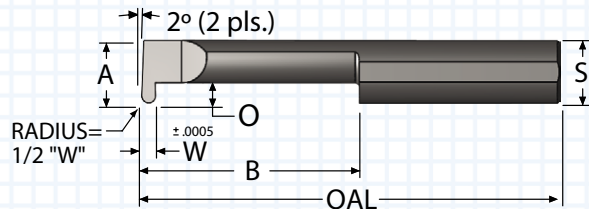

- ALTiN+ coating for higher Surface Feet per Minute
- Elliptically ground for maximum strength
- Polished flute face for optimum performance

"A" MIN BORE	"W" TOOL WIDTH	"B" MAX DEPTH	"O" OFF SET	"S" SHANK DIA.	OAL	ORDER #		EDP #	
						UNCOATED	ALTiN+	UNCOATED	ALTiN+
0.187	0.0175	0.250	0.050	0.1875	2.00	GFR017K-4	GFR017K-4A	221804	221876
0.187	0.0175	0.375	0.050	0.1875	2.00	GFR017K-6	GFR017K-6A	221807	221879
0.187	0.0175	0.500	0.050	0.1875	2.00	GFR017K-8	GFR017K-8A	221810	221882
0.187	0.0175	0.625	0.050	0.1875	2.00	GFR017K-10	GFR017K-10A	221801	221873
0.187	0.0255	0.250	0.050	0.1875	2.00	GFR025K-4	GFR025K-4A	221816	221888
0.187	0.0255	0.375	0.050	0.1875	2.00	GFR025K-6	GFR025K-6A	221819	221891
0.187	0.0255	0.500	0.050	0.1875	2.00	GFR025K-8	GFR025K-8A	221822	221894
0.187	0.0255	0.625	0.050	0.1875	2.00	GFR025K-10	GFR025K-10A	221813	221885
0.187	0.0305	0.250	0.050	0.1875	2.00	GFR030K-4	GFR030K-4A	221828	221900
0.187	0.0305	0.375	0.050	0.1875	2.00	GFR030K-6	GFR030K-6A	221831	221903
0.187	0.0305	0.500	0.050	0.1875	2.00	GFR030K-8	GFR030K-8A	221834	221906
0.187	0.0305	0.625	0.050	0.1875	2.00	GFR030K-10	GFR030K-10A	221825	221897
0.250	0.0175	0.250	0.060	0.250	2.50	GFR017Q-4	GFR017Q-4A	221912	221984
0.250	0.0175	0.375	0.060	0.250	2.50	GFR017Q-6	GFR017Q-6A	221915	221987
0.250	0.0175	0.500	0.060	0.250	2.50	GFR017Q-8	GFR017Q-8A	221918	221990
0.250	0.0175	0.625	0.060	0.250	2.50	GFR017Q-10	GFR017Q-10A	221909	221981
0.250	0.0255	0.250	0.060	0.250	2.50	GFR025Q-4	GFR025Q-4A	221924	221996
0.250	0.0255	0.375	0.060	0.250	2.50	GFR025Q-6	GFR025Q-6A	221927	221999
0.250	0.0255	0.500	0.060	0.250	2.50	GFR025Q-8	GFR025Q-8A	221930	222002
0.250	0.0255	0.625	0.060	0.250	2.50	GFR025Q-10	GFR025Q-10A	221921	221993
0.250	0.0305	0.250	0.060	0.250	2.50	GFR030Q-4	GFR030Q-4A	221936	222008
0.250	0.0305	0.375	0.060	0.250	2.50	GFR030Q-6	GFR030Q-6A	221939	222011
0.250	0.0305	0.500	0.060	0.250	2.50	GFR030Q-8	GFR030Q-8A	221942	222014
0.250	0.0305	0.625	0.060	0.250	2.50	GFR030Q-10	GFR030Q-10A	221933	222005
0.312	0.0335	0.250	0.110	0.3125	2.50	GFR033-4	GFR033-4A	222020	222068
0.312	0.0335	0.375	0.110	0.3125	2.50	GFR033-6	GFR033-6A	222023	222071
0.312	0.0335	0.500	0.110	0.3125	2.50	GFR033-8	GFR033-8A	222026	222074
0.312	0.0335	0.750	0.110	0.3125	2.50	GFR033-12	GFR033-12A	222017	222065
0.312	0.0385	0.250	0.110	0.3125	2.50	GFR038-4	GFR038-4A	222032	222080
0.312	0.0385	0.375	0.110	0.3125	2.50	GFR038-6	GFR038-6A	222035	222083
0.312	0.0385	0.500	0.110	0.3125	2.50	GFR038-8	GFR038-8A	222038	222086
0.312	0.0385	0.750	0.110	0.3125	2.50	GFR038-12	GFR038-12A	222029	222077
0.375	0.040	0.250	0.110	0.375	2.50	GFR039-4	GFR039-4A	222098	222344
0.375	0.040	0.375	0.110	0.375	2.50	GFR039-6	GFR039-6A	222101	222347
0.375	0.040	0.500	0.110	0.375	2.50	GFR039-8	GFR039-8A	222104	222350
0.375	0.040	0.750	0.110	0.375	2.50	GFR039-12	GFR039-12A	222089	222335
0.375	0.040	1.000	0.110	0.375	2.50	GFR039-16	GFR039-16A	222092	222338
0.375	0.040	1.250	0.110	0.375	2.50	GFR039-20	GFR039-20A	222095	222341
0.375	0.047	0.250	0.110	0.375	2.50	GFR046-4	GFR046-4A	222116	222362
0.375	0.047	0.375	0.110	0.375	2.50	GFR046-6	GFR046-6A	222119	222365
0.375	0.047	0.500	0.110	0.375	2.50	GFR046-8	GFR046-8A	222122	222368
0.375	0.047	0.750	0.110	0.375	2.50	GFR046-12	GFR046-12A	222107	222353
0.375	0.047	1.000	0.110	0.375	2.50	GFR046-16	GFR046-16A	222110	222356
0.375	0.047	1.250	0.110	0.375	2.50	GFR046-20	GFR046-20A	222113	222359
0.375	0.056	0.250	0.110	0.375	2.50	GFR055-4	GFR055-4A	222134	222380
0.375	0.056	0.375	0.110	0.375	2.50	GFR055-6	GFR055-6A	222137	222383
0.375	0.056	0.500	0.110	0.375	2.50	GFR055-8	GFR055-8A	222140	222386
0.375	0.056	0.750	0.110	0.375	2.50	GFR055-12	GFR055-12A	222125	222371
0.375	0.056	1.000	0.110	0.375	2.50	GFR055-16	GFR055-16A	222128	222374
0.375	0.056	1.250	0.110	0.375	2.50	GFR055-20	GFR055-20A	222131	222377

THREAD MILLS


SINGLE POINT TOOLS
GROOVING

INDEXABLE TOOLS

PORT - CAVITY

SPECIALTY

GROOVE TOOLS - FULL RADIUS - SOLID CARBIDE

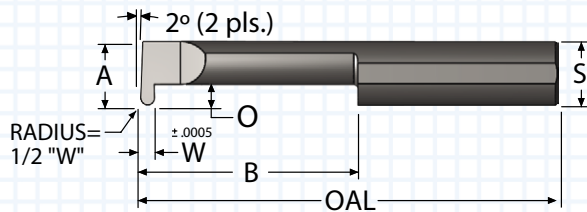

- ALTiN+ coating extends tool life
- Made with premium submicron grade carbide
- Precision ground shank flat for guaranteed tool orientation

"A" MIN BORE	"W" TOOL WIDTH	"B" MAX DEPTH	"O" OFF SET	"S" SHANK DIA.	OAL	ORDER #		EDP #	
						UNCOATED	ALTiN+	UNCOATED	ALTiN+
0.375	0.063	0.250	0.110	0.375	2.50	GFR062-4	GFR062-4A	222152	222398
0.375	0.063	0.375	0.110	0.375	2.50	GFR062-6	GFR062-6A	222155	222401
0.375	0.063	0.500	0.110	0.375	2.50	GFR062-8	GFR062-8A	222158	222404
0.375	0.063	0.750	0.110	0.375	2.50	GFR062-12	GFR062-12A	222143	222389
0.375	0.063	1.000	0.110	0.375	2.50	GFR062-16	GFR062-16A	222146	222392
0.375	0.063	1.250	0.110	0.375	2.50	GFR062-20	GFR062-20A	222149	222395
0.375	0.070	0.250	0.110	0.375	2.50	GFR069-4	GFR069-4A	222170	222416
0.375	0.070	0.375	0.110	0.375	2.50	GFR069-6	GFR069-6A	222173	222419
0.375	0.070	0.500	0.110	0.375	2.50	GFR069-8	GFR069-8A	222176	222422
0.375	0.070	0.750	0.110	0.375	2.50	GFR069-12	GFR069-12A	222161	222407
0.375	0.070	1.000	0.110	0.375	2.50	GFR069-16	GFR069-16A	222164	222410
0.375	0.070	1.250	0.110	0.375	2.50	GFR069-20	GFR069-20A	222167	222413
0.375	0.088	0.250	0.110	0.375	2.50	GFR087-4	GFR087-4A	222188	222434
0.375	0.088	0.375	0.110	0.375	2.50	GFR087-6	GFR087-6A	222191	222437
0.375	0.088	0.500	0.110	0.375	2.50	GFR087-8	GFR087-8A	222194	222440
0.375	0.088	0.750	0.110	0.375	2.50	GFR087-12	GFR087-12A	222179	222425
0.375	0.088	1.000	0.110	0.375	2.50	GFR087-16	GFR087-16A	222182	222428
0.375	0.088	1.250	0.110	0.375	2.50	GFR087-20	GFR087-20A	222185	222431
0.375	0.125	0.500	0.110	0.375	2.50	GFR124-8	GFR124-8A	222209	222455
0.375	0.125	0.750	0.110	0.375	2.50	GFR124-12	GFR124-12A	222197	222443
0.375	0.125	1.000	0.110	0.375	2.50	GFR124-16	GFR124-16A	222200	222446
0.375	0.125	1.250	0.110	0.375	2.50	GFR124-20	GFR124-20A	222203	222449
0.500	0.094	0.500	0.160	0.500	3.00	GFR093-8	GFR093-8A	222470	222620
0.500	0.094	0.750	0.160	0.500	3.00	GFR093-12	GFR093-12A	222458	222608
0.500	0.094	1.000	0.160	0.500	3.00	GFR093-16	GFR093-16A	222461	222611
0.500	0.094	1.250	0.160	0.500	3.00	GFR093-20	GFR093-20A	222464	222614
0.500	0.094	1.500	0.160	0.500	3.00	GFR093-24	GFR093-24A	222467	222617
0.500	0.126	0.500	0.160	0.500	3.00	GFR125-8	GFR125-8A	222485	222635
0.500	0.126	0.750	0.160	0.500	3.00	GFR125-12	GFR125-12A	222473	222623
0.500	0.126	1.000	0.160	0.500	3.00	GFR125-16	GFR125-16A	222476	222626
0.500	0.126	1.250	0.160	0.500	3.00	GFR125-20	GFR125-20A	222479	222629
0.500	0.126	1.500	0.160	0.500	3.00	GFR125-24	GFR125-24A	222482	222632
0.500	0.157	0.500	0.160	0.500	3.00	GFR156-8	GFR156-8A	222500	222650
0.500	0.157	0.750	0.160	0.500	3.00	GFR156-12	GFR156-12A	222488	222638
0.500	0.157	1.000	0.160	0.500	3.00	GFR156-16	GFR156-16A	222491	222641
0.500	0.157	1.250	0.160	0.500	3.00	GFR156-20	GFR156-20A	222494	222644
0.500	0.157	1.500	0.160	0.500	3.00	GFR156-24	GFR156-24A	222497	222647
0.500	0.188	0.500	0.160	0.500	3.00	GFR187-8	GFR187-8A	222515	222665
0.500	0.188	0.750	0.160	0.500	3.00	GFR187-12	GFR187-12A	222503	222653
0.500	0.188	1.000	0.160	0.500	3.00	GFR187-16	GFR187-16A	222506	222656
0.500	0.188	1.250	0.160	0.500	3.00	GFR187-20	GFR187-20A	222509	222659
0.500	0.188	1.500	0.160	0.500	3.00	GFR187-24	GFR187-24A	222512	222662
0.500	0.251	0.500	0.160	0.500	3.00	GFR250-8	GFR250-8A	222530	222680
0.500	0.251	0.750	0.160	0.500	3.00	GFR250-12	GFR250-12A	222518	222668
0.500	0.251	1.000	0.160	0.500	3.00	GFR250-16	GFR250-16A	222521	222671
0.500	0.251	1.250	0.160	0.500	3.00	GFR250-20	GFR250-20A	222524	222674
0.500	0.251	1.500	0.160	0.500	3.00	GFR250-24	GFR250-24A	222527	222677

Left-hand style available in all sizes. To order left-hand style, start order number with "LH."

SOLID CARBIDE BORING BAR FEED AND SPEED CHART

MATERIAL	HB/Rc	SPEED (SFM)		FEED IPR	CUTTING CONDITIONS					
		UNCOATED	ALTiN+		TOOL DIAMETER					
					.015-.045	.050-.100	.110-.160	.180-.230	.290-.320	.360+
					MAX DOC	MAX DOC	MAX DOC	MAX DOC	MAX DOC	MAX DOC
CAST IRON	160 HB	75-200	200-550	.0005-.010	0.006	0.008	0.010	0.014	0.020	0.031
CARBON STEEL	18 Rc	75-200	200-450	.0005-.007	0.003	0.005	0.006	0.008	0.012	0.017
ALLOY STEEL	20 Rc	75-200	200-425	.0005-.007	0.003	0.004	0.005	0.007	0.010	0.015
TOOL STEEL	25 Rc	75-175	175-300	.0005-.005	0.002	0.003	0.004	0.006	0.008	0.012
300 STAINLESS STEEL	150 HB	75-175	175-350	.0005-.005	0.003	0.003	0.004	0.006	0.008	0.013
400 STAINLESS STEEL	195 HB	75-210	130-420	.0005-.005	0.002	0.003	0.004	0.006	0.008	0.012
HIGH TEMP ALLOY (Ni & Co BASE)	20 Rc	50-130	130-300	.0005-.004	0.002	0.003	0.003	0.005	0.007	0.010
TITANIUM	25 Rc	50-120	120-275	.0005-.005	0.003	0.004	0.005	0.006	0.009	0.014
HEAT TREATED ALLOYS (38-45Rc)	40 Rc	50-100	100-200	.0005-.005	0.002	0.002	0.003	0.004	0.006	0.009
ALUMINUM	100 HB	75-250	250-750	.0005-.015	0.011	0.015	0.019	0.026	0.038	0.056
BRASS, ZINC	80 HB	75-300	250-650	.001-.010	0.009	0.012	0.015	0.021	0.030	0.045

SFM = Surface Feet Per Minute DOC = Depth of Cut IPR = Inches Per Revolution

Starting parameters only. Length-to-diameter ratios, setup, and machine rigidity may affect performance.

$$\begin{aligned} \text{SFM} &= .262 \times \text{DIAMETER} \times \text{RPM} \\ \text{RPM} &= 3.82 \times \text{SFM} \div \text{DIAMETER} \\ \text{IPM} &= \text{FPT} \times \text{Number of Teeth} \times \text{RPM} \end{aligned}$$

$$\begin{aligned} \text{Meters/Min} &= \text{SFM} \times .3048 \\ \text{Millimeters/Rev} &= \text{IPR} \times 25.40 \end{aligned}$$

SOLID CARBIDE BORING TROUBLESHOOTING

PROBLEM	CAUSE	SOLUTION
RAPID FLANK WEAR	CUTTING CONDITIONS	Check for excessive speed and feed - See chart.
	TOOL	Select a coated tool.
	PART	Make sure prior operation did not work harden the metal.
BUILT-UP EDGE	TOOL	Select a coated tool.
	CUTTING FORCE	Check for excessive feed rate (IPR) - See chart.
	HEAT	Use the SCT coolant holder. If coolant is not available, use shop air and a coated tool.
CORNER BREAKAGE	CUTTING CONDITIONS	Check for excessive feed and speed and depth of cut - see chart.
	TOOL	Select a tool with a radius. A radius is stronger than a sharp corner.
	PART	Check the drilled hole.
SURFACE TOO ROUGH	CUTTING CONDITIONS	Check for excessive feed rate (IPR) - See chart.
	BUILT-UP EDGE	See above (Built-Up Edge).
CHATTER	SET UP	Set tool above center. Reduce the overhang ratio. Clamping length should be at least 3x the boring bar diameter. Change the speed of the machine. Speed change may break up harmonics and reduce chatter.
	BORING BAR	Select the largest diameter boring bar that will bore the required diameter.
TAPER SMALLER IN BACK	CHIP PACKING	If the boring bar is too large to allow chips to evacuate, then the chips may pack on the tool and cause the bar to deflect away from the bore.
	PROGRAM	If the taper is consistent, then the program can be altered to bore a taper in opposite direction resulting in a straight hole.
TAPER BIGGER IN BACK	CUTTING FORCES	Reduce forces. Deflecting bar below center causes hole to become larger.
	BUILT-UP EDGE	Built-up edge will cause the hole to become larger until the built edge breaks off, then the hole becomes smaller.
	PROGRAM	If taper is consistent, then the program can be altered to bore a taper in the opposite direction resulting in a straight hole.

GROOVING TOOL FEED AND SPEED CHART

MATERIAL	HB/Rc	SPEED (SFM)		CUTTING CONDITIONS				
				TOOL DIAMETER				
		UNCOATED	ALTiN+	.060 -0.080	.090 -.120	.187	.250-.312	.375+
				MAX FPR	MAX FPR	MAX FPR	MAX FPR	MAX FPR
CAST IRON	160 HB	75-200	200-550	0.0010	0.0012	0.0017	0.0031	0.0044
CARBON STEEL	18 Rc	75-200	200-450	0.0007	0.0008	0.0011	0.0022	0.0030
ALLOY STEEL	20 Rc	75-200	200-425	0.0006	0.0007	0.0010	0.0019	0.0026
TOOL STEEL	25 Rc	75-175	175-300	0.0005	0.0006	0.0008	0.0015	0.0022
300 STAINLESS STEEL	150 HB	75-175	75-350	0.0006	0.0007	0.0010	0.0019	0.0026
400 STAINLESS STEEL	195 HB	75-210	130-420	0.0005	0.0006	0.0008	0.0016	0.0023
HIGH TEMP ALLOY (NICKEL & COBALT BASE)	20 Rc	50-130	130-300	0.0004	0.0005	0.0007	0.0013	0.0017
TITANIUM	25 Rc	50-120	120-275	0.0005	0.0006	0.0008	0.0016	0.0022
HEAT TREATED ALLOYS (38-45Rc)	40 Rc	50-100	100-200	0.0004	0.0004	0.0006	0.0011	0.0016
ALUMINUM	100 HB	75-250	250-750	0.0022	0.0026	0.0037	0.0065	0.0085
BRASS, ZINC	80 HB	250-300	250-650	0.0018	0.0021	0.0030	0.0053	0.0079

SFM = Surface Feet Per Minute

FPR = Feed Per Revolution

Starting parameters only. Length-to-diameter ratios, setup, and machine rigidity may affect performance.

GROOVING TOOL TROUBLESHOOTING

PROBLEM	CAUSE	SOLUTION
RAPID FLANK WEAR	CUTTING CONDITIONS	Check for excessive speed - see chart.
	TOOL	Select a coated tool.
	PART	Make sure prior operation did not work harden the material.
BUILT-UP EDGE	TOOL	Select a coated tool.
	CUTTING FORCE	Check for excessive speed rate (IPR) - see chart.
	HEAT	Use the SCT coolant holder. If coolant is not available, use shop air and a coated tool.
CHATTER	CUTTING CONDITIONS	Reduce RPM and increase feed rate within the feed and speed chart parameters.
	CLAMPING	Clamping length should be a minimum of 3x the shank diameter in the tool holder. Check tool holding rigidity.
	TOOL	Hone cutting edge. A light hone (0.0001-0.0003 inch) will help keep force constant.
TOOL BREAKAGE	CUTTING CONDITIONS	Check for excessive feed rate (IPR) - see chart.
	CHIP PACKING	Stagger - Peck grooving.

SINGLE POINT THREADING TECHNICAL CHART

MATERIAL	HB/Rc	SPEED (SFM)		FIRST PASS DEPTH					
		UNCOATED	ALTiN+	TOOL DIAMETER					
				.040-.050	.060-.092	.120-.152	.180-.232	.290-.362	.373+
CAST IRON	160 HB	75-200	200-550	0.003	0.004	0.005	0.007	0.008	0.009
CARBON STEEL	18 Rc	75-200	200-450	0.003	0.005	0.006	0.007	0.008	0.009
ALLOY STEEL	20 Rc	75-200	200-425	0.003	0.004	0.005	0.006	0.007	0.008
TOOL STEEL	25 Rc	75-175	175-300	0.002	0.003	0.004	0.005	0.006	0.007
300 STAINLESS STEEL	150 HB	75-175	175-350	0.003	0.003	0.004	0.005	0.006	0.007
400 STAINLESS STEEL	195 HB	75-210	130-420	0.003	0.004	0.005	0.006	0.006	0.007
HIGH TEMP ALLOY (NICKEL & COBALT BASE)	20 Rc	50-130	130-300	0.002	0.003	0.003	0.004	0.005	0.005
TITANIUM	25 Rc	50-100	120-275	0.003	0.003	0.004	0.005	0.006	0.007
HEAT TREATED ALLOYS (38-45Rc)	40 Rc	50-100	100-200	0.002	0.002	0.003	0.004	0.004	0.005
ALUMINUM	100 HB	75-250	200-750	0.004	0.005	0.007	0.008	0.010	0.011
BRASS, ZINC	80 HB	75-300	250-650	0.003	0.005	0.006	0.007	0.008	0.009

Parameters are a starting point based on machinability rating at hardness listed.
Check machinability rating of the material to be machined and adjust First Pass Depth.

Helpful Formulas and Information

$$\text{PITCH} = \frac{1}{\text{TPI}}$$

TPI = Threads Per Inch

ACME Thread Depth = Pitch × 0.5

Stub ACME Thread Depth = Pitch × 0.3

NPT Pipe Thread Depth = Pitch × 0.76

Internal 60° Thread Depth = Pitch × 0.54

Feed Rate = Pitch × Number of Thread Starts

Minimum Depth per Pass should not be less than 0.0003


Threads not ending in a relief need at least one thread pitch length of pullout

Make sure feed rate calculation does not exceed the maximum feed rate of the machine

SINGLE POINT THREADING TROUBLESHOOTING


PROBLEM	CAUSE	SOLUTION
RAPID FLANK WEAR	CUTTING CONDITIONS	Check for excessive speed - see chart.
	PART	Make sure prior operation did not work harden the material.
	TOOL	Select a coated tool.
BUILT-UP EDGE	TOOL	Select a coated tool.
	CUTTING FORCE	Increase the number of passes.
	HEAT	Use the SCT coolant holder. If coolant is not available, use shop air and a coated tool.
CORNER BREAKAGE	CUTTING CONDITIONS	Reduce the depth-of-cut on the first pass.
	PROGRAM	If there is no thread relief, withdraw the tool on an angle.
	PART	End in thread relief.
CHIPS WRAPPING AROUND TOOL	TOOL	Use a tool that is at least 30% smaller than the hole diameter.

RADIAL INFEEED

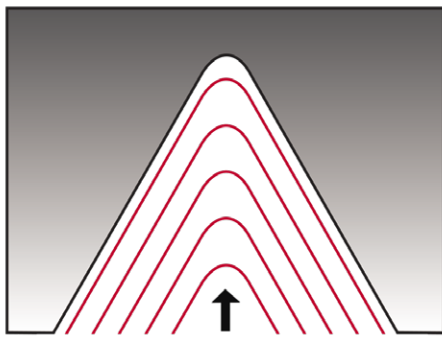

NOT RECOMMENDED

MODIFIED FLANK

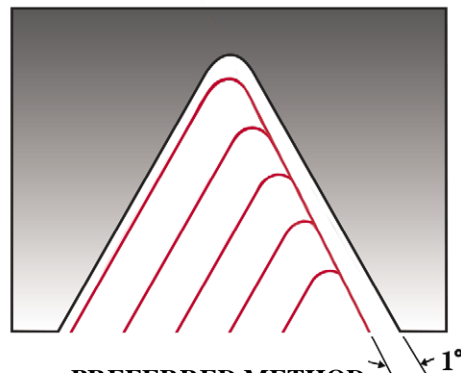

PREFERRED METHOD

Radial Infeed is not recommended. Modified flank at 1° is recommended.

For unfavorable length-to-diameter ratios or difficult-to-machine materials, the number of passes will need to be increased up to 40% more.

Depth of cut per pass should not be less than 0.0003 inch.

SINGLE POINT CBN & PCD TECHNICAL & APPLICATION

PCD TIPPED TOOL INFORMATION

SCT PCD tools and inserts are excellent for continuous cutting of a wide range of non-ferrous and non-metal materials. The products are precision ground for machining to sub-micron finishes with maximum tool life. PCD allows for higher cutting speeds with longer tool life.

SINGLE POINT TOOLS
TECH INFO

MATERIAL	BHN/Rc	SPEED RANGE (SFM)	FEED IPR	SINGLE POINT PCD TIPPED BARS			
				TOOL DIAMETER			
				.120-160 MAX DOC	.180-.230 MAX DOC	.290-.320 MAX DOC	.360+ MAX DOC
LOW SILICON ALUMINUM	225-350 BHN	1000-5000	.001-.007	0.015	0.021	0.03	0.045
HIGH SILICON ALUMINUM	270-425 BHN	600-3000	.001-.007	0.015	0.021	0.03	0.045
METAL MATRIX COMPOSITIES	N/A	500-2000	.001-.007	0.008	0.012	0.02	0.03
COPPER ALLOYS, BRASS, BRONZE	80-120 BHN	750-3500	.001-.007	0.015	0.021	0.03	0.045
PRESINTERED TUNGSTEN CARBIDE	140-300 BHN	100-350	.001-.005	0.003	0.005	0.007	0.012
ACRYLICS	N/A	700-1500	.001-.007	0.015	0.021	0.03	0.045
FIBERGLASS	N/A	600-1000	.001-.007	0.012	0.02	0.03	0.045
GRAPHITES	N/A	600-1000	.001-.007	0.015	0.021	0.03	0.045
NYLON, PLASTIC	N/A	700-1500	.001-.007	0.015	0.021	0.03	0.045
HARD RUBBER	N/A	500-2500	.001-.007	0.015	0.021	0.03	0.045

APPLICATION GUIDELINES
Make sure the machine and setup is rigid and solid. Chatter will cause chipping.
Tool height when boring should be slightly above center. Tool deflection will put the tool on center.
Do not stop the machine with the tool in cut. This will result in tool breakage.
Use of coolant will reduce heat and improve surface finish.
Do not contact the tool to a hard surface prior to the machining process- this will cause chipping.
Higher speeds minimize tool buildup.
Depth of cut should not exceed 70% of PCD tip length.

As the DOC decreases the feed rate can increase DOC = Depth of Cut SFM = Surface Feet per Minute

CBN TIPPED TOOL INFORMATION

SCT CBN tools and inserts are excellent for continuous cutting of a wide range of hardened steels, powdered metals, cast irons and super alloys. The products are precision ground with hones for machining to sub-micron finishes with maximum tool life. CBN tipped tools and inserts can take the place of grinding.

MATERIAL	BHN/Rc	SPEED RANGE (SFM)	FEED IPR	SINGLE POINT CBN TIPPED BARS			
				TOOL DIAMETER			
				.120-160 MAX DOC	.180-.230 MAX DOC	.290-.320 MAX DOC	.360+ MAX DOC
HEAT TREATED ALLOY	45-60Rc	200-600	.001-.005	0.003	0.004	0.006	0.009
TOOL STEEL	45-60Rc	200-600	.001-.005	0.003	0.004	0.006	0.009
NODULAR IRON	N/A	600-1500	.001-.005	0.006	0.01	0.02	0.03
PEARLITIC IRON	220-240BHN	600-2500	.001-.007	0.006	0.01	0.02	0.03
WHITE/CHILLED IRON	54-60Rc	200-500	.001-.005	0.005	0.008	0.012	0.015
SUPER ALLOY Ni BASE	240-475 BHN	200-800	.001-.005	0.003	0.004	0.006	0.025
COBOLT BASED ALLOY, STELLITE	45-55Rc	200-500	.001-.005	0.003	0.004	0.006	0.009
INCONELS	45-55Rc	200-500	.001-.005	0.003	0.004	0.006	0.009

APPLICATION GUIDELINES
Make sure the machine and setup is rigid and solid. Chatter will cause chipping
Tool height when boring should be slightly above center. Tool deflection will put the tool on center.
Do not stop the machine with the tool in cut. This will result in tool breakage.
Coolant use is not advised as it could cause thermal cracking.
Do not contact the tool to a hard surface prior to the machining process. This will cause chipping.
Depth of cut should not exceed 30% of CBN tip length.

As the DOC decreases the feed rate can increase DOC = Depth of Cut SFM = Surface Feet per Minute