


# DRILL MILLS - SOLID CARBIDE

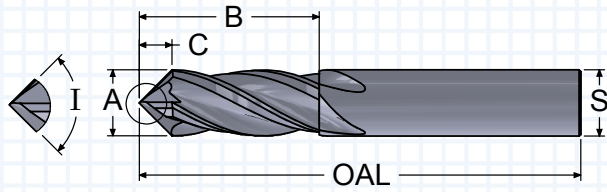

- For milling, chamfering and light spotting applications
- ALTiN+ coating for higher cutting speed
- Precision ground for maximum concentricity

"I" INCLUDED ANGLE	"A" TOOL DIA.	"B" LENGTH OF CUT	"C" TIP LENGTH	"S" SHANK DIA.	OAL	FLUTES	ORDER #		EDP #	
							UNCOATED	ALTiN+	UNCOATED	ALTiN+
90°	0.125	0.500	0.061	0.125	1.50	2	DRM125-02-090	DRM125-02-090A	502000	502002
90°	0.125	0.500	0.061	0.125	1.50	4	DRM125-04-090	DRM125-04-090A	502008	502010
90°	0.1875	0.625	0.092	0.1875	2.00	2	DRM187-02-090	DRM187-02-090A	502016	502018
90°	0.1875	0.625	0.092	0.1875	2.00	4	DRM187-04-090	DRM187-04-090A	502024	502026
90°	0.250	0.750	0.123	0.250	2.50	2	DRM250-02-090	DRM250-02-090A	502032	502034
90°	0.250	0.750	0.123	0.250	2.50	4	DRM250-04-090	DRM250-04-090A	502040	502042
90°	0.3125	0.812	0.155	0.3125	2.50	2	DRM312-02-090	DRM312-02-090A	502048	502050
90°	0.3125	0.812	0.155	0.3125	2.50	4	DRM312-04-090	DRM312-04-090A	502056	502058
90°	0.375	1.000	0.186	0.375	2.50	2	DRM375-02-090	DRM375-02-090A	502064	502066
90°	0.375	1.000	0.186	0.375	2.50	4	DRM375-04-090	DRM375-04-090A	502072	502074
90°	0.500	1.000	0.248	0.500	3.00	2	DRM500-02-090	DRM500-02-090A	502080	502082
90°	0.500	0.100	0.248	0.500	3.00	4	DRM500-04-090	DRM500-04-090A	502088	502090
120°	0.125	0.500	0.035	0.125	1.50	2	DRM125-02-120	DRM125-02-120A	502004	502006
120°	0.125	0.500	0.035	0.125	1.50	4	DRM125-04-120	DRM125-04-120A	502012	502014
120°	0.1875	0.625	0.053	0.1875	2.00	2	DRM187-02-120	DRM187-02-120A	502020	502022
120°	0.1875	0.625	0.053	0.1875	2.00	4	DRM187-04-120	DRM187-04-120A	502028	502030
120°	0.250	0.750	0.071	0.250	2.50	2	DRM250-02-120	DRM250-02-120A	502036	502038
120°	0.250	0.750	0.071	0.250	2.50	4	DRM250-04-120	DRM250-04-120A	502044	502046
120°	0.3125	0.812	0.089	0.3125	2.50	2	DRM312-02-120	DRM312-02-120A	502052	502054
120°	0.3125	0.812	0.089	0.3125	2.50	4	DRM312-04-120	DRM312-04-120A	502060	502062
120°	0.375	1.000	0.107	0.375	2.50	2	DRM375-02-120	DRM375-02-120A	502068	502070
120°	0.375	1.000	0.107	0.375	2.50	4	DRM375-04-120	DRM375-04-120A	502076	502078
120°	0.500	1.000	0.143	0.500	3.00	2	DRM500-02-120	DRM500-02-120A	502084	502086
120°	0.500	0.100	0.143	0.500	3.00	4	DRM500-04-120	DRM500-04-120A	502092	502094

THREAD MILLS

SINGLE POINT

INDEXABLE TOOLS

PORT - CAVITY

SPECIALTY END MILLS  
DRILL MILL