
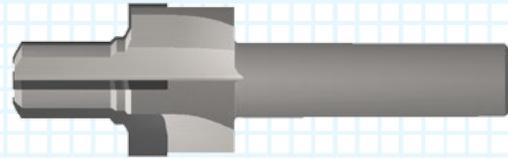


AND10050 - REAMER PILOT PORT TOOL CARBIDE TIPPED

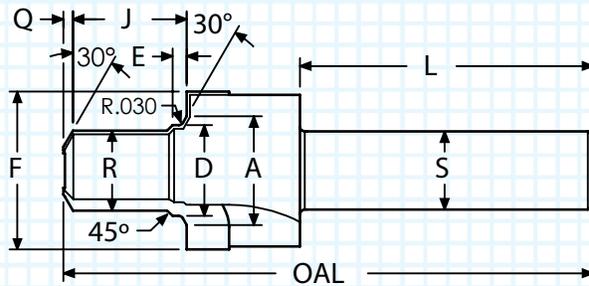

- Reams the minor-thread diameter to size
- Bodies made with heat treated alloy steel
- Bodies made with heat treated alloy steel
- ALTiN+ coating extends tool life

A	D	E	F	J	R	Q	L	S	OAL	FLUTES	TUBE	THREAD	ORDER #	
													UNCOATED	ALTiN+
0.446	0.3305	0.071	0.742	0.520	0.271	0.032	1.75	0.500	3.00	3	0.125	0.3125-24 UNF-3B	AND10050-2R	AND10050-2RA
0.508	0.3925	0.071	0.805	0.520	0.333	0.040	1.75	0.500	3.00	3	0.188	0.3750-24 UNF-3B	AND10050-3R	AND10050-3RA
0.570	0.4565	0.083	0.888	0.610	0.386	0.045	1.88	0.500	3.12	4	0.250	0.4375-20 UNF-3B	AND10050-4R	AND10050-4RA
0.633	0.5195	0.083	0.950	0.610	0.449	0.045	1.88	0.500	3.12	4	0.312	0.5000-20 UNF-3B	AND10050-5R	AND10050-5RA
0.696	0.5825	0.091	1.012	0.630	0.506	0.060	1.88	0.500	3.38	4	0.375	0.5625-18 UNF-3B	AND10050-6R	AND10050-6RA
0.883	0.7715	0.102	1.240	0.738	0.686	0.070	2.12	0.750	3.70	4	0.500	0.7500-16 UNF-3B	AND10050-8R	AND10050-8RA
1.008	0.8985	0.115	1.415	0.801	0.802	0.080	2.12	0.750	3.80	4	0.625	0.8750-14 UNF-3B	AND10050-10R	AND10050-10RA
1.242	1.0885	0.133	1.665	0.926	0.976	0.080	2.12	0.750	3.94	4	0.750	1.0625-12 UN-3B	AND10050-12R	AND10050-12RA
1.495	1.3385	0.133	1.965	0.958	1.226	0.080	2.25	1.000	4.25	4	1.000	1.3125-12 UN-3B	AND10050-16R	AND10050-16RA
1.808	1.6505	0.133	2.310	1.004	1.538	0.090	2.25	1.000	4.35	4	1.250	1.6250-12 UN-3B	AND10050-20R	AND10050-20RA
2.058	1.9005	0.133	2.628	1.145	1.788	0.095	2.25	1.000	4.54	4	1.500	1.8750-12 UN-3B	AND10050-24R	AND10050-24RA
2.433	2.2755	0.133	3.050	1.260	2.163	0.095	2.50	1.250	4.92	4	1.750	2.2500-12 UN-3B	AND10050-28R	AND10050-28RA
2.683	2.5265	0.133	3.520	1.395	2.413	0.095	2.50	1.250	5.15	4	2.000	2.5000-12 UN-3B	AND10050-32R	AND10050-32RA

Thread mills available. See pages 9-19.

