



AUTOCLAVE PORT TOOLS

SOLID CARBIDE AND CARBIDE-TIPPED

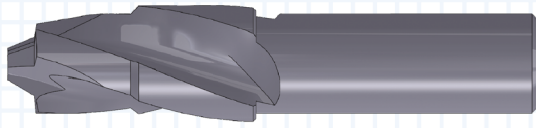

- Designed to produce ports per Parker Autoclave Standard
- Precision ground for maximum concentricity
- Polished flute face for optimum performance
- AlTiN+ coating for improved tool life

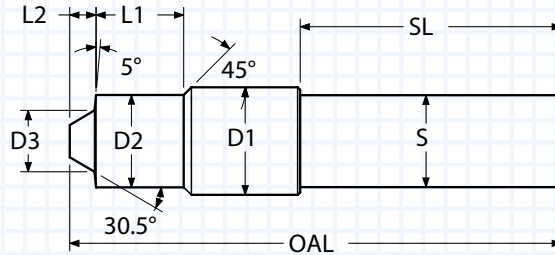

MEDIUM PRESSURE

D1	D2	D3	L1	L2	S	SL	OAL	FLUTES	FLUTE TYPE	TUBE	THREAD	CONNECTION TYPE	ORDER #	EDP #
													AlTiN+	AlTiN+
Solid Carbide														
0.500	0.390	0.188	0.471	0.101	0.500	2.13	3.50	3	Helical	1/4	7/16-20	SF250CX	PT-SF0250CX-A	405006
0.625	0.511	0.310	0.599	0.134	0.500	2.13	3.50	3	Helical	3/8	9/16-18	SF375CX	PT-SF0375CX-A	405008
0.875	0.752	0.500	0.715	0.213	0.750	2.13	4.00	3	Helical	9/16	13/16-16	SF562CX10 SF562CX20	PT-SF0562CX-A	405010
Carbide-Tipped														
1.090	0.966	0.625	0.899	0.216	0.750	2.25	4.50	3	Straight	3/4	3/4-14 NPS	SF750CX10 SF750CX20	PT-SF0750CX-A	405012
1.438	1.297	0.875	1.266	0.418	0.750	2.25	4.75	3	Straight	1	1-3/8-12	SF1000CX10 SF1000CX20	*PT-SF1000CX-A	405014

HIGH PRESSURE

D1	D2	D3	L1	L2	S	SL	OAL	FLUTES	FLUTE TYPE	TUBE	THREAD	CONNECTION TYPE	ORDER #	EDP #
													AlTiN+	AlTiN+
Solid Carbide														
0.625	0.511	0.170	0.405	0.096	0.500	2.13	3.50	3	Helical	1/4	9/16-18	F250C	PT-F0250C-A	405016
0.750	0.574	0.250	1.032	0.167	0.500	2.13	4.00	3	Helical	5/16	5/8-18	F312C150	PT-F0312C-A	405018
0.875	0.691	0.260	0.586	0.150	0.750	2.13	4.00	3	Helical	3/8	3/4-16	F375C	PT-F0375C-A	405020
Carbide-Tipped														
1.220	1.047	0.380	0.704	0.212	0.750	2.25	4.50	2	Straight	9/16	1-1/8-12	F562C F562C40 F562C40-312	PT-F0562C-A	405022
1.438	1.297	0.875	1.266	0.418	0.750	2.25	4.75	3	Straight	1	1-3/8-12	F1000C43	*PT-F1000C-A	405024

* PT-SF1000CX-A and PT-F1000C-A are interchangeable tools.

PORT & CAVITY TECHNICAL INFORMATION

MATERIAL	HB/Rc	SPEED (SFM)		CUTTING CONDITIONS	
		UNCOATED	ALTiN+	INFEEED PER FLUTE REAM	INFEEED PER FLUTE SPOT FACE
CAST IRON	130 HB	75-210	200-450	.001-.0025	.0008-.0020
CARBON STEEL*	18 Rc	125-190 (Not Ideal)	190-400	.001-.0030	.001-.0020
ALLOY STEEL*	20 Rc	70-135 (Not Ideal)	130-350	.001-.0030	.0008-.0020
TOOL STEEL*	25 Rc	75-100 (Not Ideal)	100-220	.001-.0025	.0005-.0020
300 STAINLESS STEEL*	150 HB	90-100 (Not Ideal)	100-230	.001-.0020	.0007-.0015
400 STAINLESS STEEL*	195 HB	90-135 (Not Ideal)	135-300	.001-.0020	.0005-.0015
HIGH TEMP ALLOY* (NICKEL & COBALT BASE)	20 Rc	30-125 (Not Ideal)	100-150	.0008-.0015	.0005-.0010
TITANIUM	25 Rc	50-100	100-140	.001-.0020	.0005-.0010
HEAT TREATED ALLOYS (38-45Rc)	40 Rc	50-75	75-130	.0008-.0015	.0005-.0010
ALUMINUM	100 HB	850-1000	800-1500	.002-.0040	.0010-.0030
BRASS, ZINC	80 HB	750-950	800-1200	.002-.0040	.0010-.0030

SFM = Surface Feet per Minute

RPM = SFM x 3.82 divided by tool diameter

Starting parameters only. Setup and machine rigidity may affect performance.

*ALTiN+ is highly recommended for steel, stainless steel & high temp alloy.

PROBLEM	CAUSE	SOLUTION
RAPID FLANK WEAR	CUTTING CONDITIONS	Check for excessive speed and feed - see chart.
	TOOL	Select a coated tool.
	PROGRAM	Remove dwell from program at end of cut.
BUILT-UP EDGE	TOOL	Select a coated tool. The coating will resist built-up edges.
	HEAT	Use coolant through port tool. If coolant is not available, use shop air and a coated tool.
SURFACE TORN	TOOL	Use a coated tool. On most carbon steels, an uncoated tool will not produce an acceptable finish.
CHATTER	TOOL	Hone cutting edge of spot face. Use Coated Tool. Increase chip load.
LIGHT CHATTER	PROGRAM	Increase speed by 15-20%. A faster speed reduces forces. A dwell typically will not remove chatter.
POOR TOOL LIFE	AMOUNT OF STOCK	Rough port to 0.97 inch of finish size.
	PART	Make sure prior operation did not work harden the material.

SAMPLE PROGRAM FOR MAXIMUM PRODUCTIVITY

N51 (Sample Port Tool Program: MS33649-4RA (ALTiN+) cutting Carbon Steel

T51 M06

S2916 M03

G00 G90 G54 X0. Y0.

G43 H51 Z0.1 M08

G01 Z-0.6 F23.3

S1290 M03

G04 P1.

G01 Z-.73 F10.3

G00 Z5. M09

Select Tool

SFM = 300 ; RPM = 300 x 3.82 / Reamer Diameter

RPM = 300 X 3.82 / 0.393

RPM = 2916

Feed Rate = RPM x 0.002 x 4 (Number of Flutes)

RPM = 300 x 3.82 / 0.888 (Spot Face Diameter)

Dwell to slow down spindle

Feed rate = RPM x 0.002 x 4 (Number of Flutes)